

DESCRIPTION Serial Number:
Stationary Phase: CA-5
Film Thickness: 0.25 µm

15802


Part Number: 0206705
Length: 30 m
ID: 0.32 mm

TEST CONDITIONS

Oven Temp: 125°C

Inj. Temp: 250°C
Det. Temp: 275°C
Detector Type: FID
Split Ratio: 56:1
Test Station: GC 2

Carrier Gas: Helium
Flow Rate: 1.06 ml/min
Linear Velocity: 22.0 cm/sec
Pressure: 8.0 psi
Sample Size: 0.4 µl

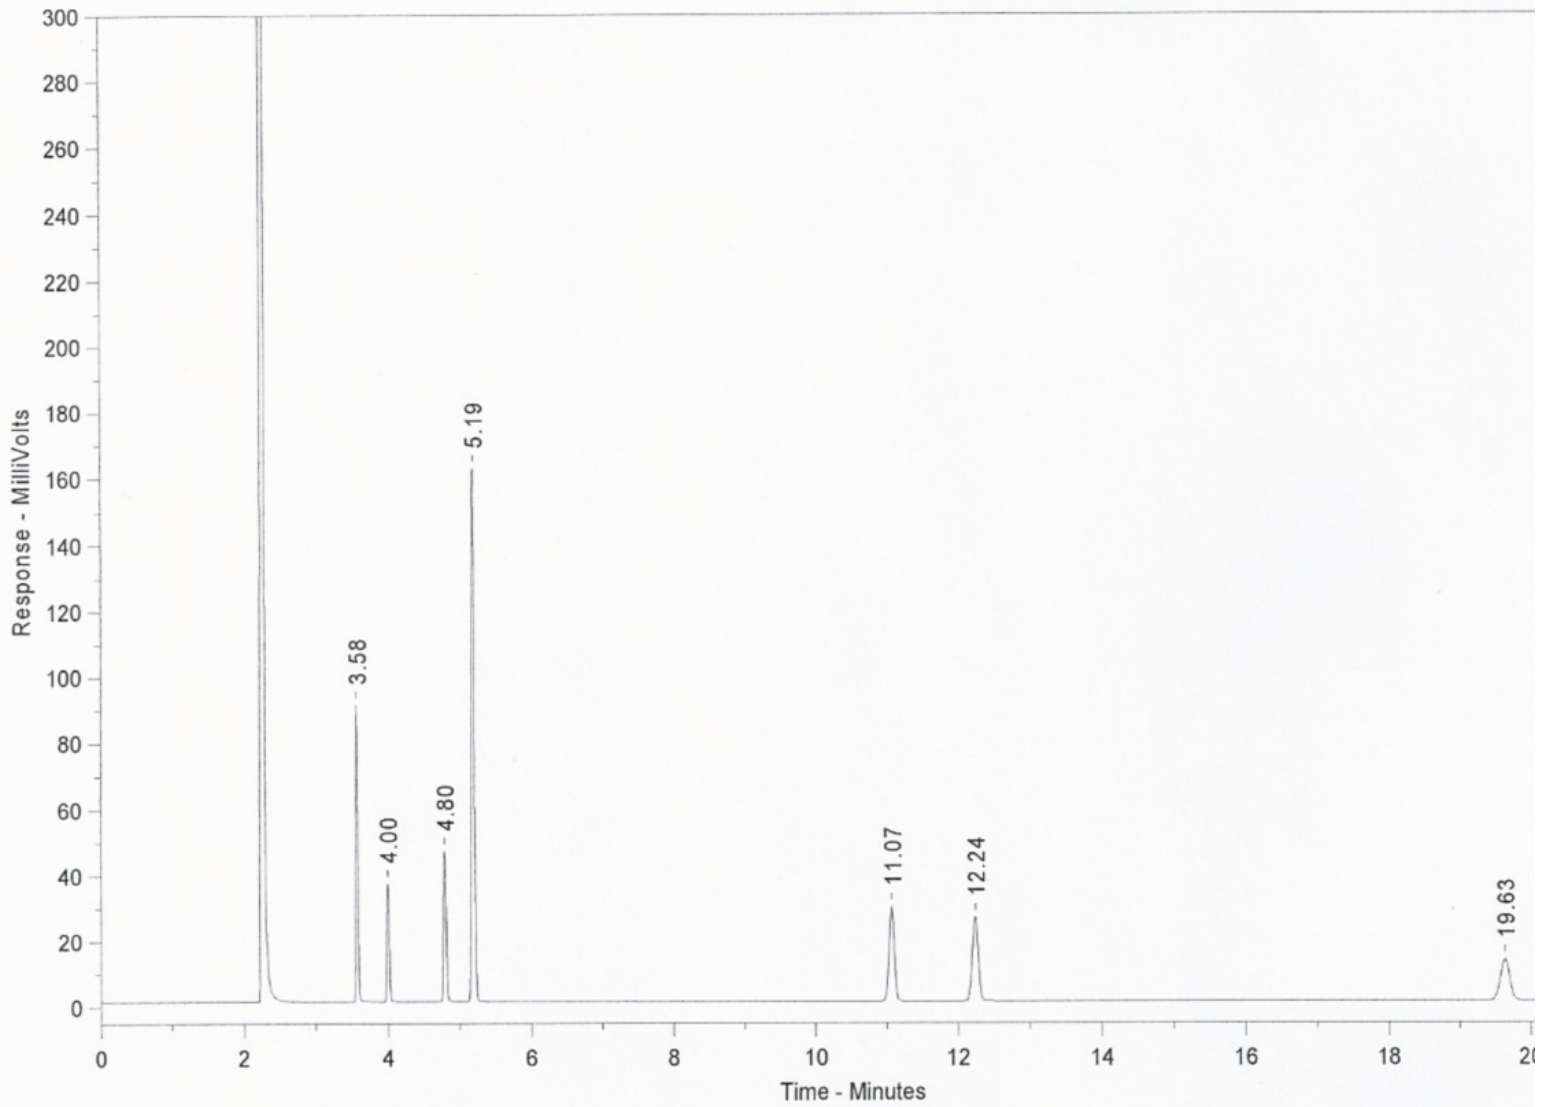

Retention Time (min)	Name	Conc. (mg/ml)	k'	Efficiency (plates/meter)
3.58	1-Octanol	1.0	.58	3048
4.00	2,6-Dimethylphenol	.8	.76	2692
4.80	2,6-Dimethylaniline	.8	1.11	2768
5.19	Naphthalene	1.0	1.29	2807
11.07	n-Tetradecane	1.0	3.88	3554
12.24	Me. Undecanoate	1.0	4.39	3430
19.63	Me. Dodecanoate	1.0	7.65	3497