

DESCRIPTION Serial Number:  
Stationary Phase: CA-5  
Film Thickness: 1.00 µm

15662


Part Number: 0206907  
Length: 30 m  
ID: 0.53 mm

TEST CONDITIONS

Oven Temp: 150°C

Inj. Temp: 250°C  
Det. Temp: 275°C  
Detector Type: FID  
Split Ratio: 20:1  
Test Station: Instrument 1

Carrier Gas: Helium  
Flow Rate: 3.05 ml/min  
Linear Velocity: 23.0 cm/sec  
Pressure: 4.0 psi  
Sample Size: 0.4 µl

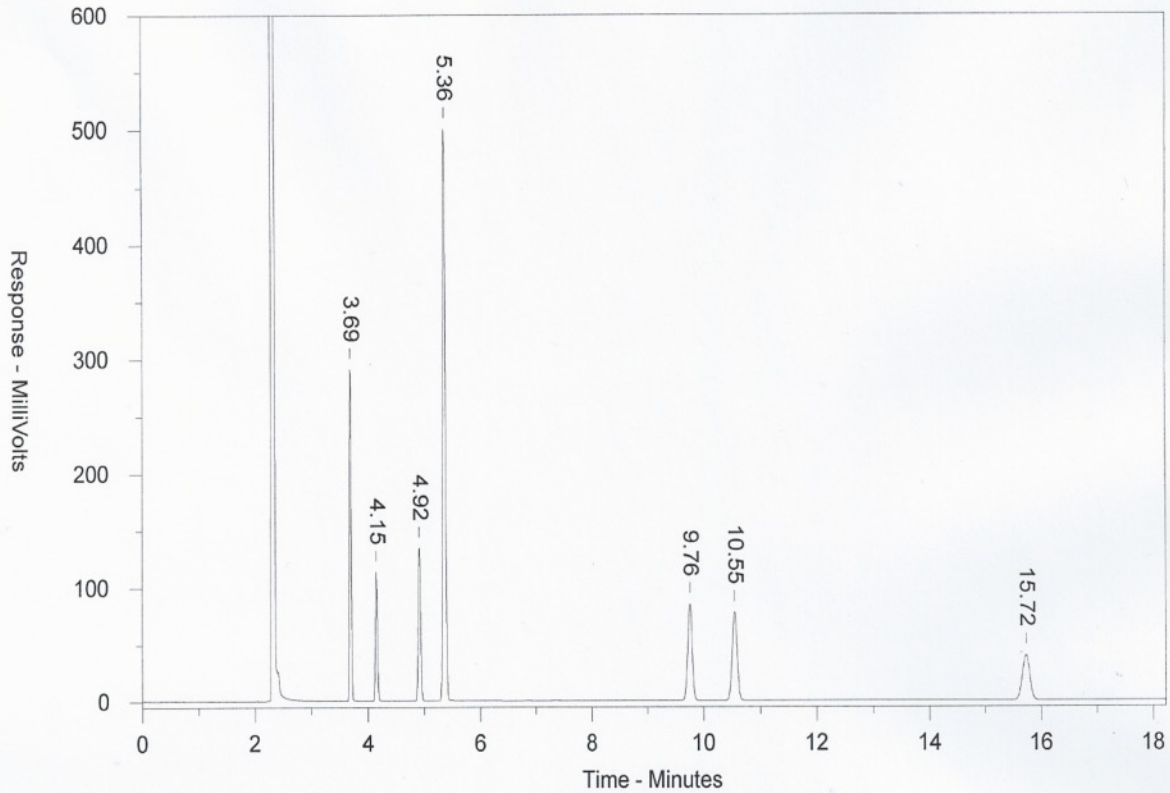

Retention Time (min)	Name	Conc. (mg/ml)	k'	Efficiency (plates/meter)
3.69	1-Octanol	1.0	.70	2435
4.15	2,6-Dimethylphenol	.8	.91	2187
4.92	Naphthalene	1.0	1.27	2136
5.36	2,6-Dimethylaniline	.8	1.47	2188
9.76	Me. Undecanoate	1.0	3.50	2268
10.55	n-Tetradecane	1.0	3.86	2266
15.72	Me. Dodecanoate	1.0	6.25	2147