

DESCRIPTION Serial Number: 15800
Stationary Phase: CA-5
Film Thickness: 1.20 µm


Part Number: 0206919
Length: 30 m
ID: 0.53 mm

TEST CONDITIONS

Oven Temp: 150°C

Inj. Temp: 250°C
Det. Temp: 275°C
Detector Type: FID
Split Ratio: 21:1
Test Station: Instrument 1

Carrier Gas: Helium
Flow Rate: 2.91 ml/min
Linear Velocity: 22.0 cm/sec
Pressure: 4.0 psi
Sample Size: 0.4 µl

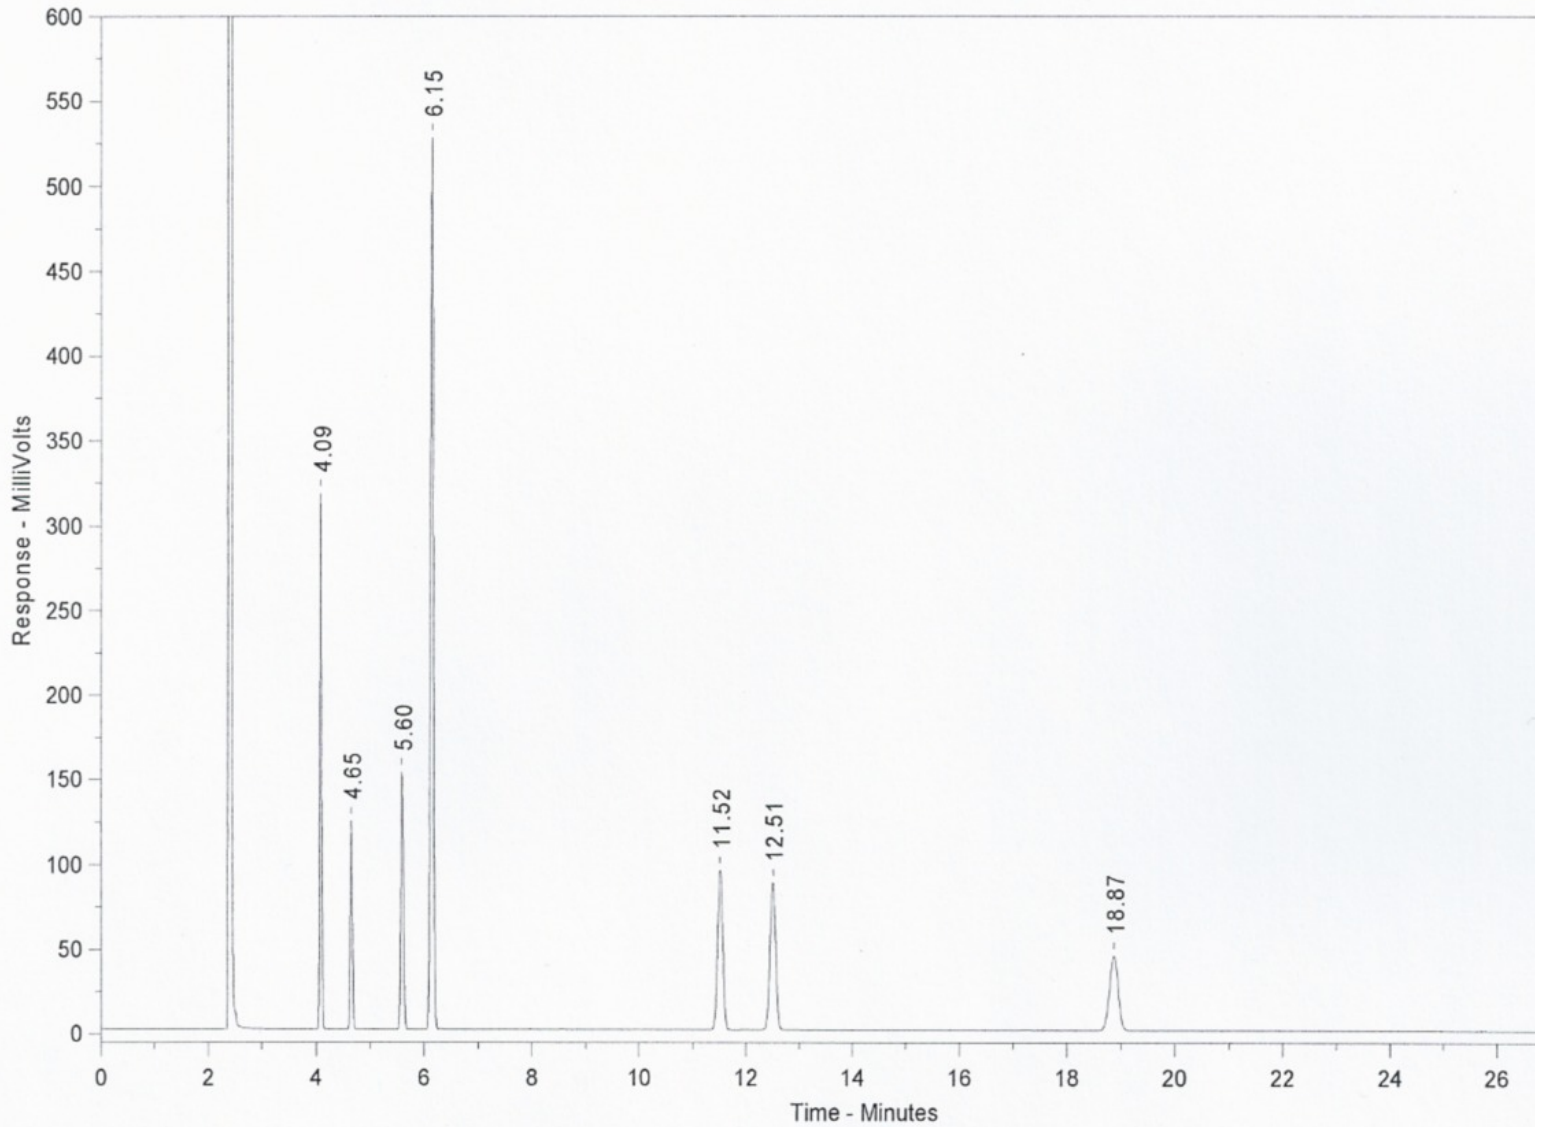

Retention Time (min)	Name	Conc. (mg/ml)	k'	Efficiency (plates/meter)
4.09	1-Octanol	1.0	.80	2277
4.65	2,6-Dimethylphenol	.8	1.05	2070
5.60	2,6-Dimethylaniline	.8	1.47	2067
6.15	Naphthalene	1.0	1.71	2049
11.52	n-Tetradecane	1.0	4.08	2150
12.51	Me. Undecanoate	1.0	4.51	2154
18.87	Me. Dodecanoate	1.0	7.31	2146